

Lift and Transport Truck HTW 50/110 with Slewing Ring



The lift- and transport truck has a rugged, torsion-resistant frame structure and is made of powder coated steel (grey – RAL 7035). Additionally, it has a smoothly running, integrated hydraulic unit for foot-actuated vertical adjustment for easy handling. 4 steerable solid rubber wheels, 2 of them lockable, 1 enabling locking as regards to the direction, $d = 125$ mm with special roller bearings, permanently lubricated and maintenance-free, which ensure an absolutely noiseless movement. The extremely low deadweight permits straightforward shunting and operation of the lift and transport truck. A special valve ensures even lowering at various loads. The additional structure (slewing ring) can be slewed through 90° to the right and left side, and can be fixed in these positions. A stainless steel roller track comprising 6 carrying rollers of corrosion-resistant material and plastic coating has been arranged on top of the truck. A holding device secures the body tray or coffin plate lying on it. The slide handle of the lift and transport truck can be removed. An anti-collision buffer is mounted to the front end.

Technical Data:

Dimensions lowest Position W/D/H:	2150 x 750 x 320 mm
Dimensions highest Position W/D/H:	2150 x 750 x 1660 mm
Rotation left / right:	each side 90°
Carrying capacity:	max. 250 kg
Material:	Steel
Colour:	Lightgrey RAL 7035 (powder coated)
Type:	HTW 50/110
Article No.:	050.030.010

Additional models see back page



KUGEL medical GmbH & Co. KG
Hermann-Köhl-Str. 2A
DE - 93049 Regensburg/Germany

Phone +49/941/20 86 48-0
Fax +49/941/20 86 48-29
www.KUGEL-medical.de



KUGEL
medical
■ ■ ■ ■

Lift and Transport Truck HTW 51/110 with Slewing Ring – Made of Stainless Steel

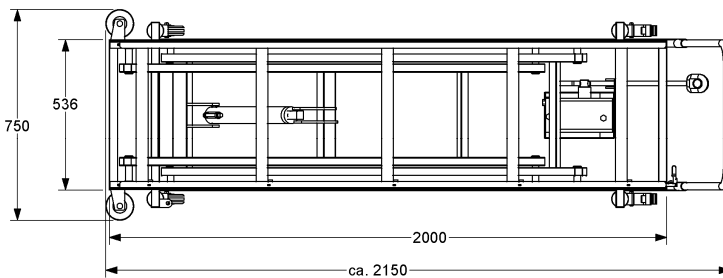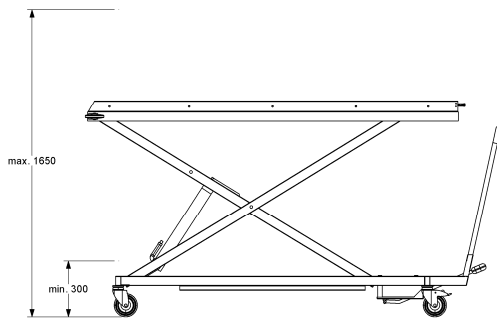

TekEquipment™

Ph: 1300 368 138

www.tekequipment.com.au

info@tekequipment.com.au

TekMed NZ™

Ph: 0800 456 217

info@tekmed.co.nz

www.tekmed.co.nz

The lift- and transport truck has a rugged, torsion-resistant frame structure and is completely made of stainless steel (Material no. 1.4301 – ANSI 304). Additionally it has a smoothly running, integrated hydraulic unit for foot-actuated vertical adjustment for easy handling. 4 steerable solid rubber wheels, 2 of them lockable, 1 enabling locking as regards to the direction, $d = 125$ mm with special roller bearings, permanently lubricated and maintenance-free, which ensure an absolutely noiseless movement. The extremely low deadweight permits straightforward shunting and operation of the lift and transport truck. A special valve ensures even lowering at various loads. The additional structure (slewing ring) can be slewed through 90° to the right and the left side, and can be fixed in these positions. A stainless steel roller track comprising 6 carrying rollers of corrosion-resistant material and plastic coating has been arranged on top of the truck. A holding device secures the body tray or coffin plate lying on it. The slide handle of the lift and transport truck can be removed. An anti-collision buffer is mounted to the front end.

Technical Data:

Dimensions lowest Position W/D/H:	2150 x 750 x 320 mm
Dimensions highest Position W/D/H:	2150 x 750 x 1660 mm
Rotation left / right:	each side 90°
Carrying capacity:	max. 250 kg
Material:	Stainless steel (Material No. 1.4301 – ANSI 304)
Type:	HTW 51/110
Article No.:	050.100.010

KUGEL medical GmbH & Co. KG
Hermann-Köhl-Str. 2A
DE - 93049 Regensburg/Germany

Phone +49/941/20 86 48-0
Fax +49/941/20 86 48-29
www.KUGEL-medical.de



KUGEL
medical
■ ■ ■ ■